




Development Kit Manual

SIM900-EVB_UGD_V1.01

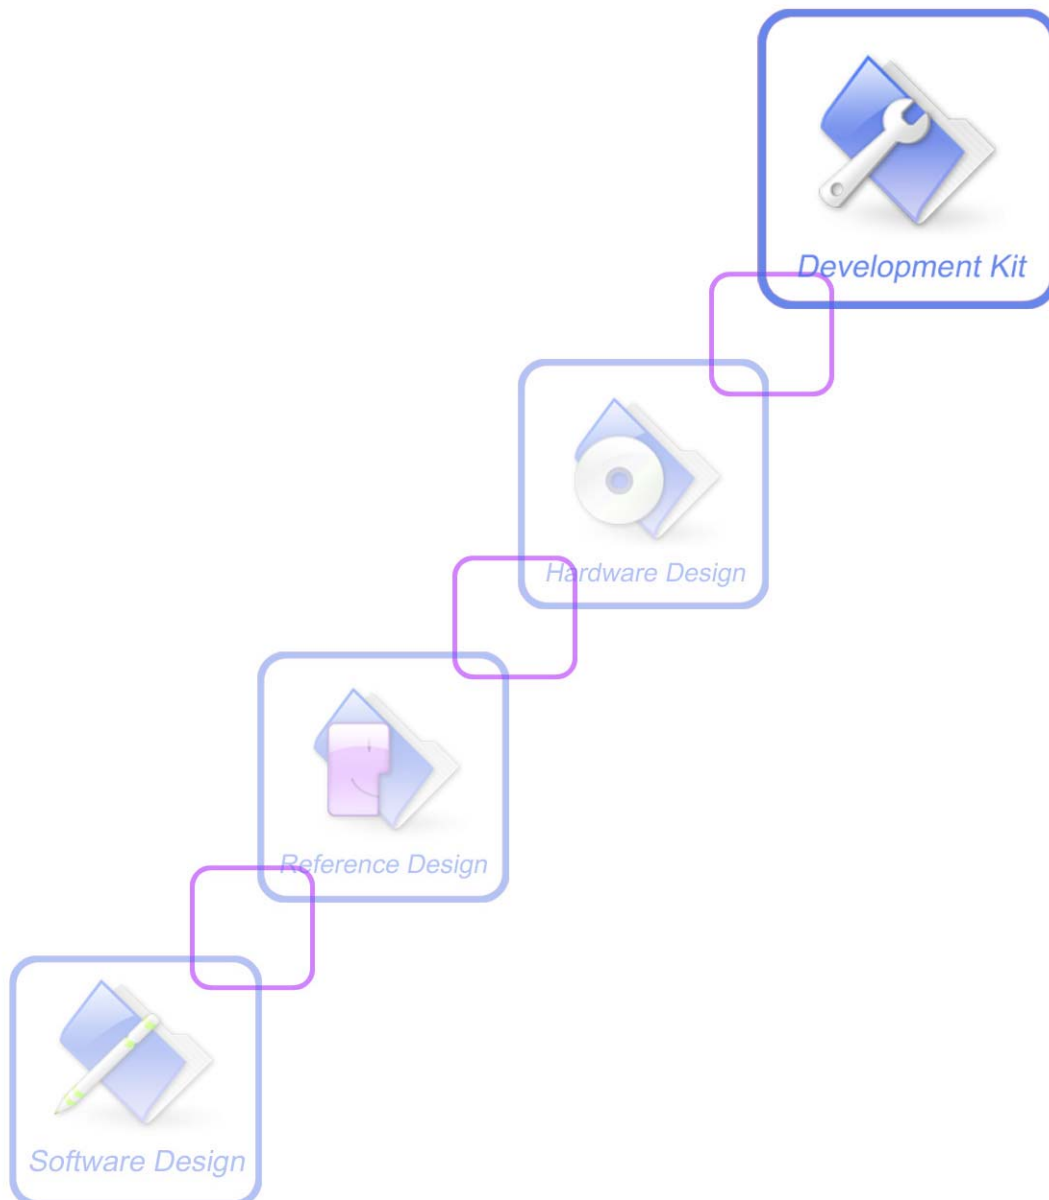

Document Title:	SIM900 EVB User Guide
Version:	1.01
Date:	2009-12-8
Status:	Release
Document Control ID:	SIM3900-EVB_UGD_V1.01

General Notes

Simcom offers this information as a service to its customers, to support application and engineering efforts that use the products designed by Simcom. The information provided is based upon requirements specifically provided to Simcom by the customers. Simcom has not undertaken any independent search for additional relevant information, including any information that may be in the customer's possession. Furthermore, system validation of this product designed by Simcom within a larger electronic system remains the responsibility of the customer or the customer's system integrator. All specifications supplied herein are subject to change.

Copyright

This document contains proprietary technical information which is the property of SIMCOM Limited., copying of this document and giving it to others and the using or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights reserved in the event of grant of a patent or the registration of a utility model or design. All specification supplied herein are subject to change without notice at any time.

Copyright © Shanghai SIMCom Wireless Solutions Ltd. 2009

Contents

Contents	3
Version History	4
1. SIM900 EVB.....	5
2. EVB accessory	7
3. Accessory Interface	8
3.1 Power Interface	8
3.2 Audio Interface.....	9
3.3 SIM card interface.....	10
3.4 Antenna Interface	11
3.5 RS232 Interface.....	12
3.6 Operating Status LED	13
4. Test Interface.....	14
4.1 J103	14
4.2 J201	15
4.3 J104	16
5. EVB and accessory equipment.....	18
6. Illustration:	19
6.1 Running:.....	19
6.2 Connecting Net and calling	19
6.3 Downloading.....	19
6.4 Turns off.....	19

Figure Index

FIGURE 1: EVB TOP VIEW	5
FIGURE 2: EVB BOTTOM VIEW.....	6
FIGURE 3: EVB ACCESSORY.....	7
FIGURE 4: POWER INTERFACE.....	8
FIGURE 5: AUDIO INTERFACE	9
FIGURE 6: SIM CARD INTERFACE.....	10
FIGURE 7: ANTENNA INTERFACE	11
FIGURE 8: SERIAL PORTS.....	12
FIGURE 9: STATUSLED	13
FIGURE 10: TEST INTERFACE OVERVIEW	14
FIGURE 11: J103 INTERFACE.....	14
FIGURE 12: J201 INTERFACE	15
FIGURE 13: J104 INTERFACE	16
FIGURE 14: EVB AND ACCESSORY EQUIPMENT	18

Version History

Data	Version	Description of change	Author
2009-12-08	1.01	Origin	Lee

SCOPE

This document give the usage of SIM900 EVB, user can get useful info about the SIM900 EVB quickly through this document.

This document is subject to change without notice at any time.

1. SIM900 EVB

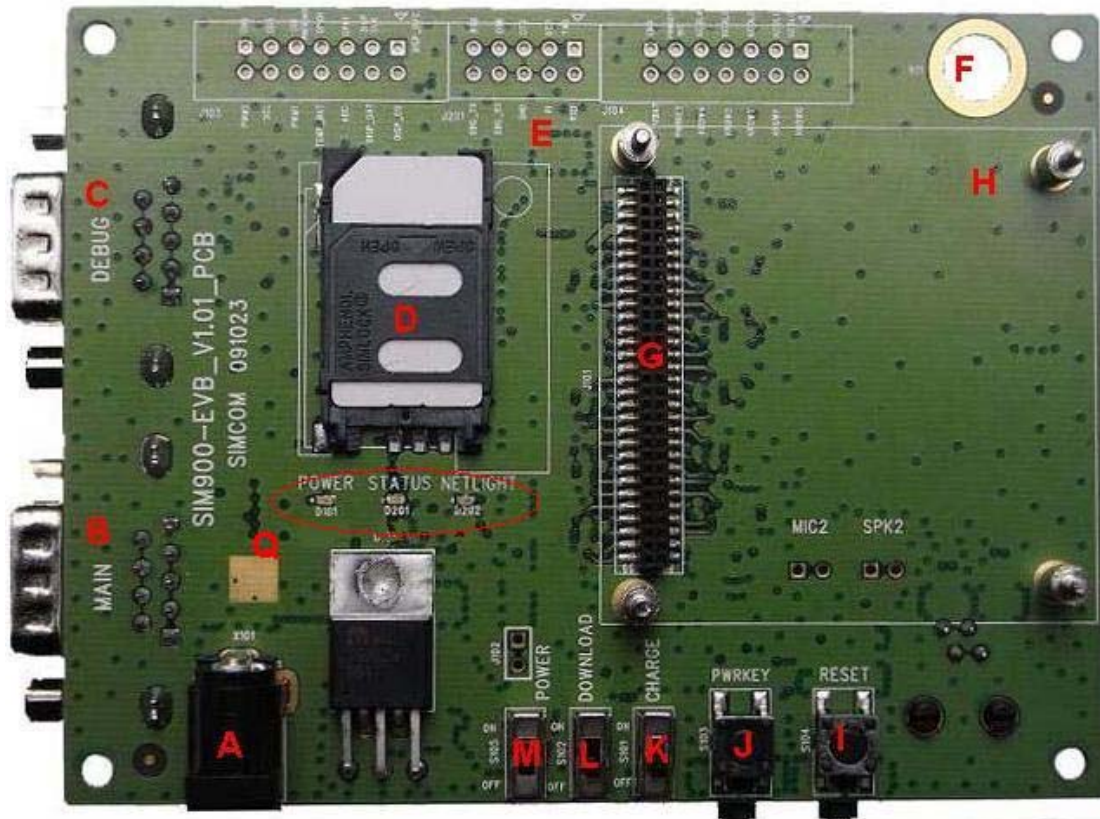


Figure 1: EVB TOP view



Figure 2: EVB BOTTOM view

- A: Source adapter interface
- B: MAIN serial port for downloading, AT command transmitting, data exchanging
- C: DEBUG serial port
- D: SIM card interface
- E: Test point interface
- F: Antenna fix hole
- G: SIM900-TE with SIM900 module interface
- H: Module fix hole
- I: Reset key (reset the module)
- J: Power key (module ON/OFF control)
- K: Charge switch (charge ON/OFF control)
- L: Download switch (download control)
- M: Power switch (power ON/OFF control)
- N: Headphones interface
- O: Headset interface
- P: Line in interface
- Q: Status light

2. EVB accessory



Figure 3: EVB accessory

- A: antenna
- B: antenna transmit line
- C: 5V DC source adapter
- D: serial port line

3. Accessory Interface

3.1 Power Interface

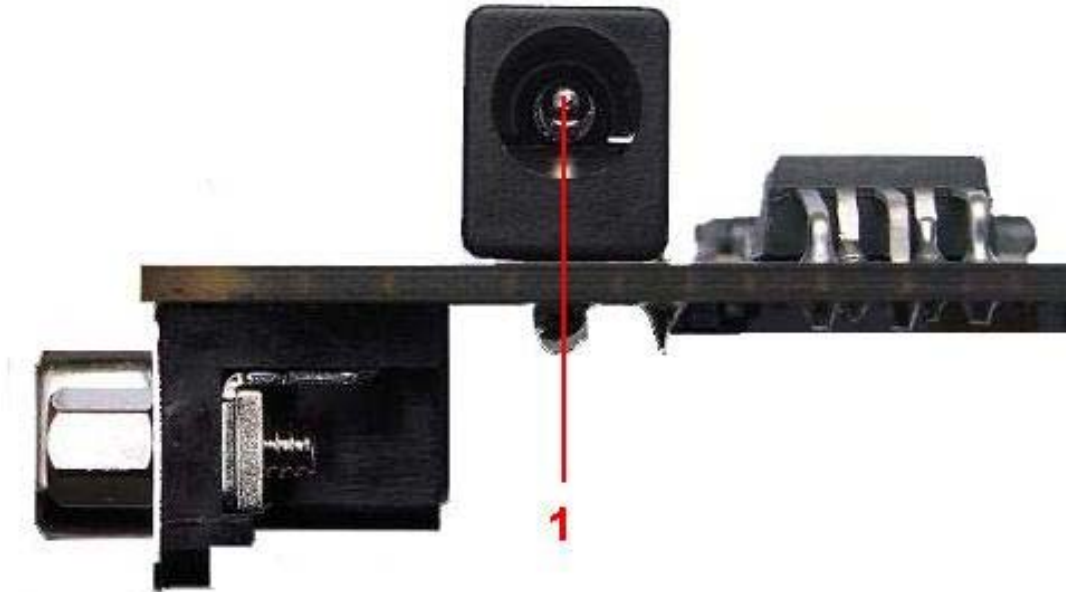


Figure 4: Power Interface

Pin	Signal	I/O	Description
1	Adapter input	I	5V/2.5A DC source input

3.2 Audio Interface

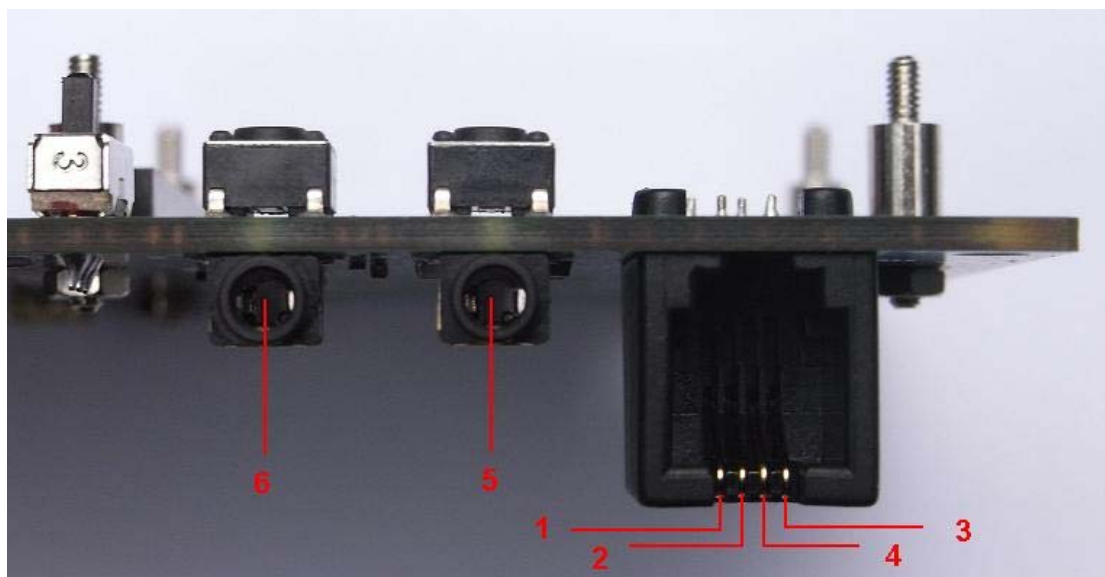


Figure 5: Audio Interface

Headset interface:

Pin	Signal	I/O	Description
1	MIC1P	I	Positive microphone input
2	SPK1P	O	Positive receiver output
3	MIC1N	I	Negative microphone input
4	SPK1N	O	Negative receiver output

Earphone interface:

Pin	Signal	Input/Output	Description
5	MIC2P&SPK2P	I/O	Auxiliary positive input and output

Line in interface:

Pin	Signal	Input/Output	Description
6	Line in R/L	I/O	Line in signal

3.3 SIM card interface

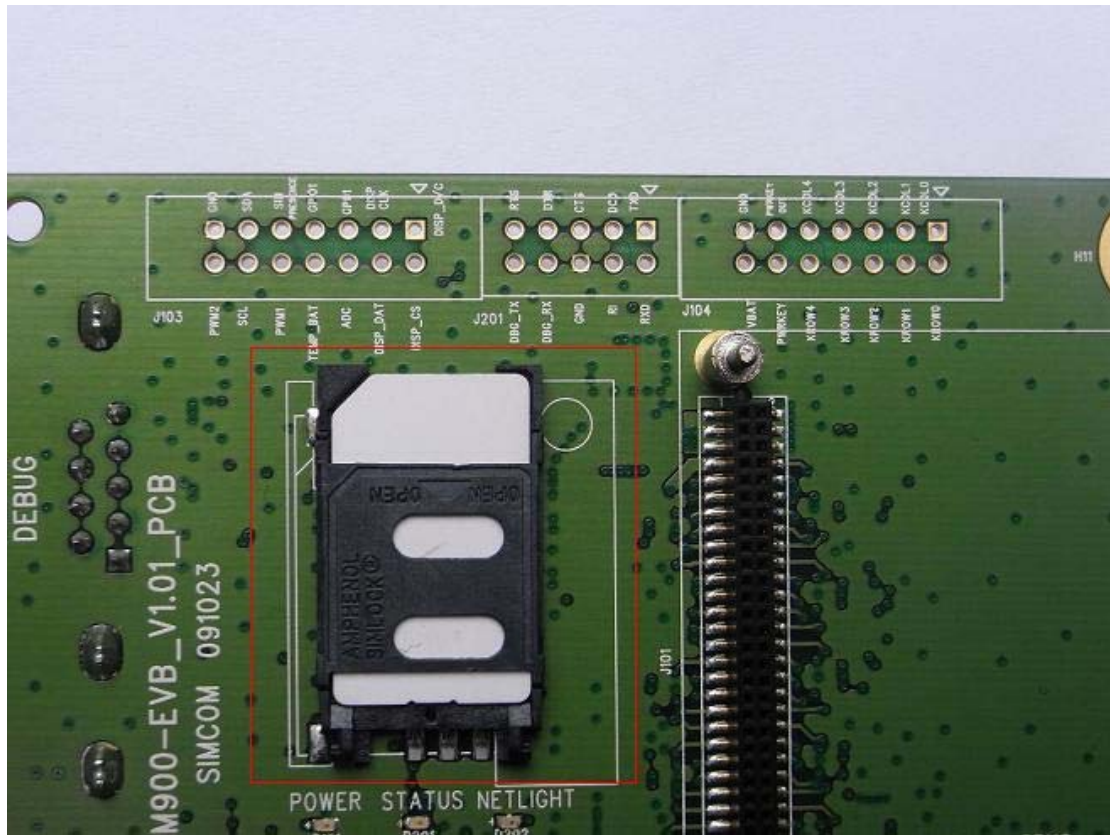


Figure 6: SIM card interface

3.4 Antenna Interface



Figure 7: Antenna Interface

3.5 RS232 Interface

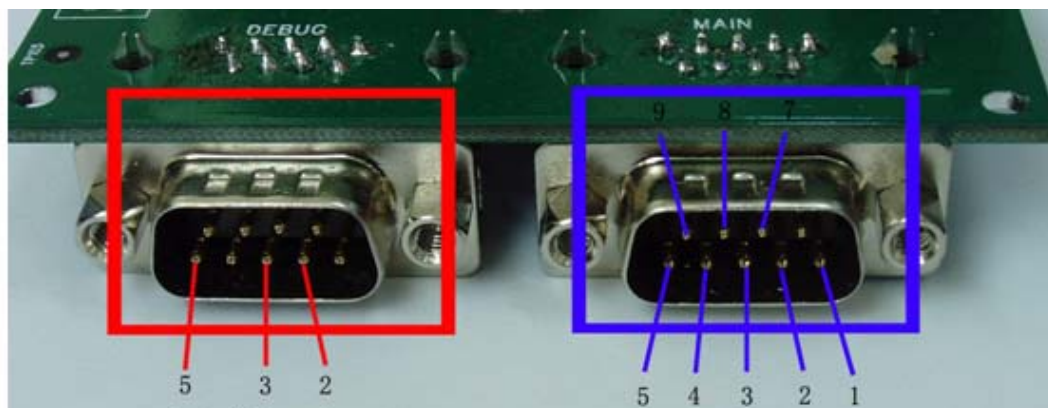


Figure 8: Serial Ports

Serial Port 1——MAIN Interface

Serial Port 2——DEGUG Interface

Main Interface:

Pin	Signal	I/O	Description
1	DCD	O	Data carrier detection
2	TXD	O	Transmit data
3	RXD	I	Receive data
4	DTR	I	Data Terminal Ready
5	GND		GND
7	RTS	I	Request to Send
8	CTS	O	Clear to Send
9	RI	O	Ring Indicator

Debug Interface:

Pin	Signal	I/O	Description
2	DEBUG_TX	O	Transmit data
3	DEBUG_RX	I	Receive data
5	GND		GND

3.6 Operating Status LED

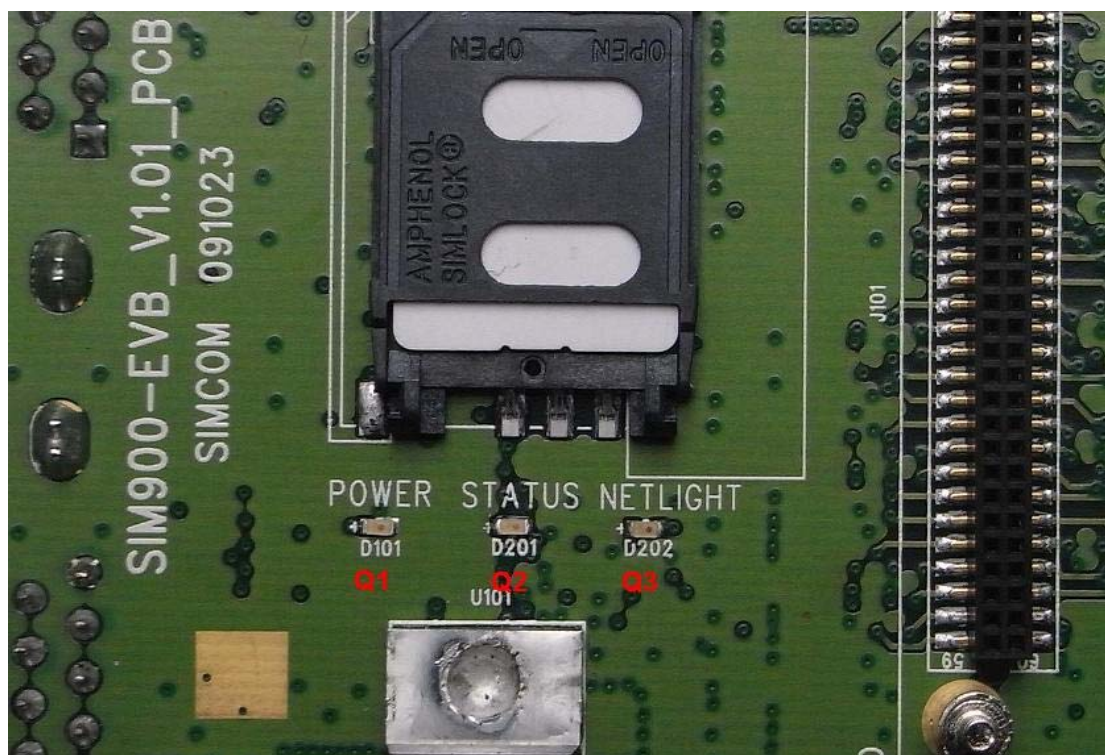


Figure 9: StatusLED

Working state of status LED as list:

Name	Description	STATUS
Q1	VBAT ON/OFF indicator	Bright: VBAT ON; Extinct: VBAT OFF
Q2	GSM part status indicator	Bright: Module runs normally Extinct: System is powered down or module runs unconventionally
Q3	GSM_NET status indicator	Blinking at a certain frequency according various GSM net status

4. Test Interface

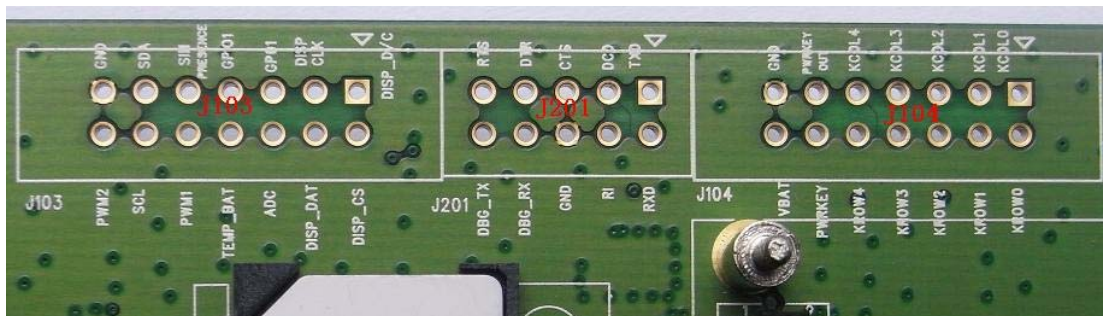


Figure 10: Test interface overview

4.1 J103

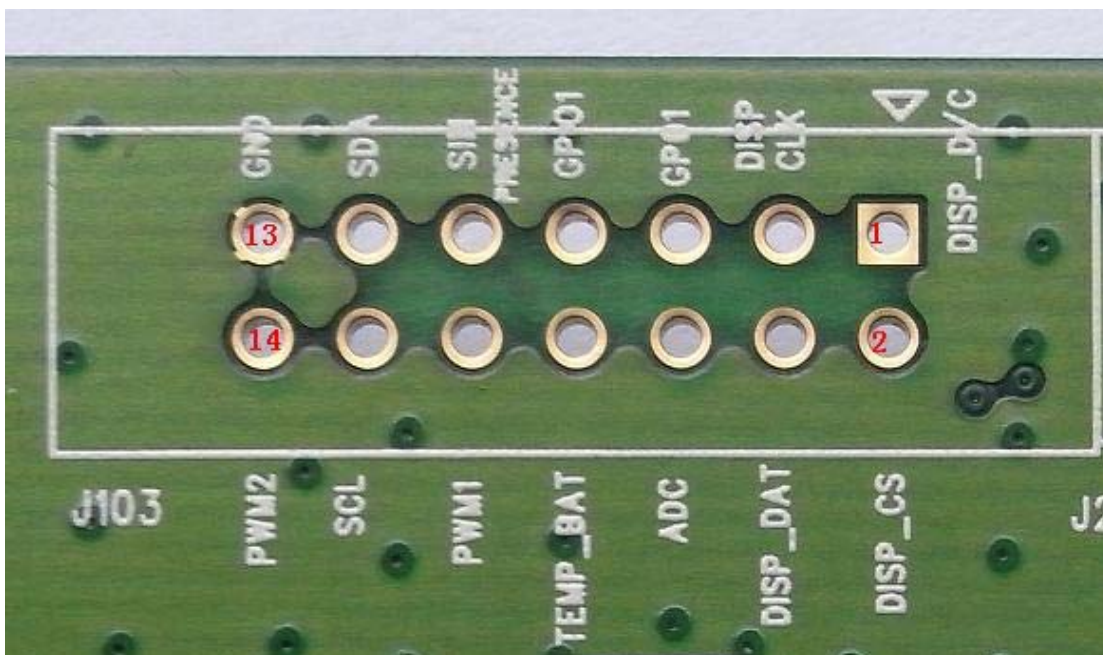


Figure 11: J103 Interface

J103 Interface Pin List:

Pin	Signal	I/O	Description
1	DISP_D/C	O	Display data or address select
2	DISP_CS	O	Display select output
3	DISP_CLK	O	Display clock output
4	DISP_DAT	I/O	Display data line
5	GP01	O	GPO
6	ADC	I	ADC IN

SIM900 EVB User Guide

7	GPIO1	I/O	GPIO
8	TEMP_BAT	I	ADC input
9	SIMPRESNCE	I	SIM detect input
10	PWM1	O	PWM output
11	SDA	I/O	I2C BUS DATA
12	SCL	O	I2C BUS CLOCK
13	GND	POWER	GND
14	PWM2	O	PWM output

4.2 J201

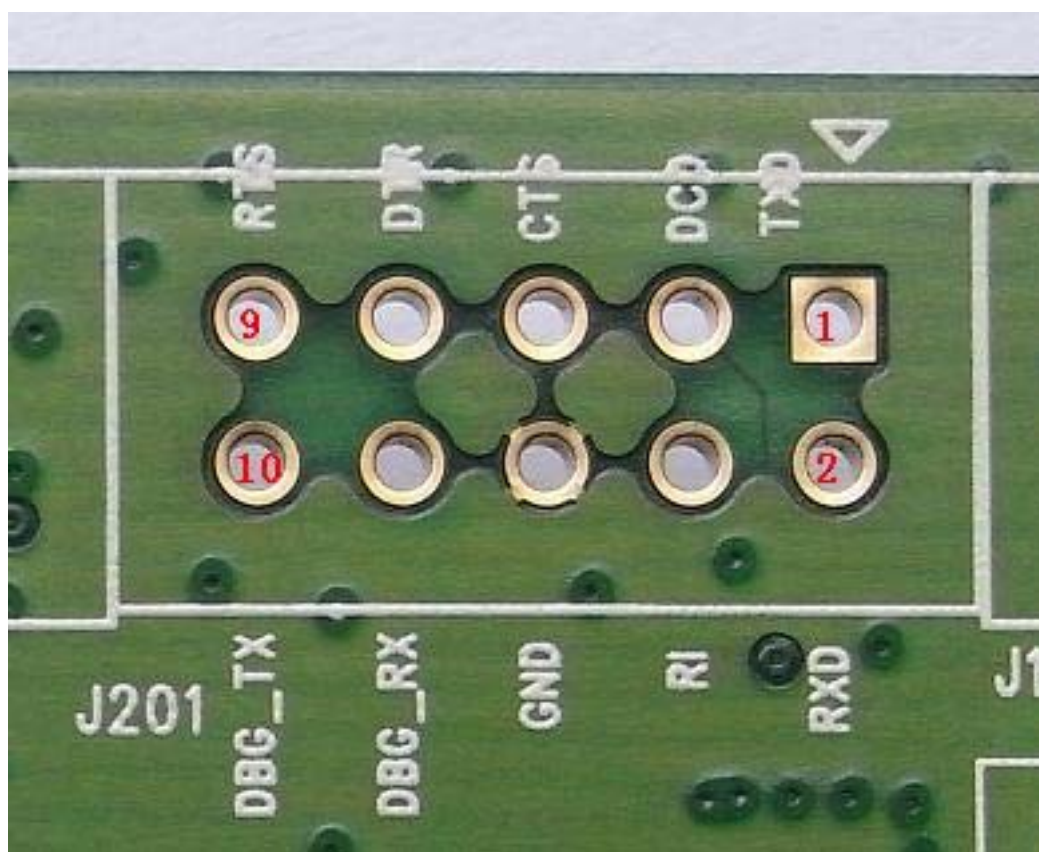


Figure 12: J201 Interface

J201 Interface Pin List:

Pin	Signal	I/O	Description
1	TXD	O	Transmit data

SIM900 EVB User Guide

2	RXD	I	Receive data
3	DCD	O	Data carrier detection
4	RI	O	Ring Indicator
5	CTS	O	Clear to Send
6	GND		GND
7	DTR	I	Data Terminal Ready
8	DEBUG_RX	I	Receive data
9	RTS	I	Request to Send
10	DEBUG_TX	O	Transmit data

4.3 J104

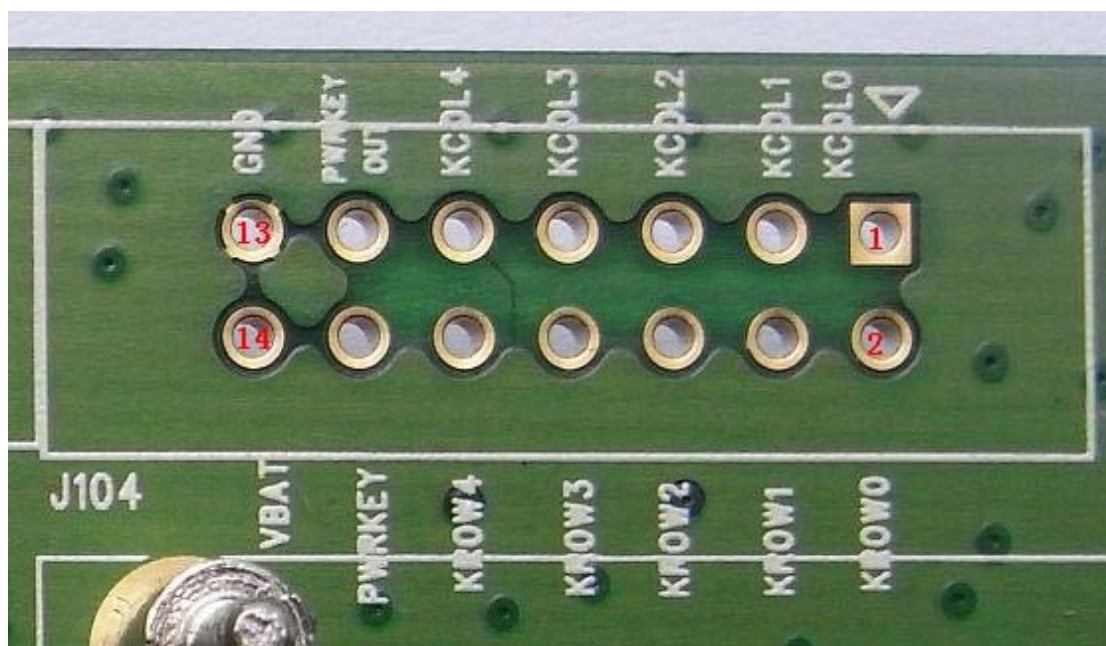


Figure 13: J104 Interface

J104 Interface Pin List:

Pin	Signal	I/O	Description
1	KCOL0		Keypad array interface
2	KROW0	I	
3	KCOL1		
4	KROW1		
5	KCOL2		
6	KROW2		

SIM900 EVB User Guide

7	KCOL3		
8	KROW3		
9	KCOL4		
10	KROW4		
11	PWRKEY_OUT	O	POWER KEY OUT
12	PWRKEY	I	POWER KEY IN
13	GND	POWER	GND
14	VBAT	POWER	POWER

5. EVB and accessory equipment

At normal circumstance, the EVB and its accessory are equipped as the Figure 14



Figure 14: EVB and accessory equipment

6. Illustration:

6.1 Running:

- (1) Connect the SIM900-TE with SIM900 module to the 60pins connector on SIM900 EVB, inserting 5V direct current source adapter, switching the S101,S102 switch on **off** state, S105 switch on **ON** state;
- (2) Press the PWRKEY for about 1 second, and then SIM900 module begins running.

You can see the light Q3 on the EVB flashing at a certain frequency. By the state, you can judge whether the EVB and SIM900 can run or not. No function and test can be executed when we have not connected necessary accessories.

6.2 Connecting Net and calling

- (1) connect the serial port line to the MAIN serial port, open the HyperTerminal(AT command windows) on your Personal computer, the location of the HyperTerminal in windows2000 is START → accessory → communication → HyperTerminal. Set correct Baud Rate and COM number. The Baud Rate of SIM900 is 115200, and the COM number based on which USB port your serial port line insert in, you should select such as COM3 or COM4 etc.
- (2) Connect the antenna to the SIM900-TE with SIM900 module using an antenna transmit line, insert SIM card into the SIM card interface, insert headphones or headset into its interface.
- (3) Act on the step of **running** which mentioned above, power on the system, typing the AT command in the HyperTerminal, and then the SIM900 module will execute its corresponding function.

6.3 Downloading

Connect the serial port line to the **MAIN** serial port, connect the direct current source adapter, run the download program and press the **START** key, then switch the S105 switch on **ON** state, S102 switch on **ON** state, then EVB provide the function of downloading.

6.4 Turns off

Turn off SIM900 module: press the PWRKEY for about 2 second, SIM900 module will be turned off.

Contact us:

Shanghai SIMCom Wireless Solutions Ltd.

Add: SIM Technology Building, No.633, Jinzhong Road, Changning District,
Shanghai P.R. China 200335

Tel: +86 21 3235 3300

Fax: +86 21 3235 3301

URL: www.sim.com/wm